
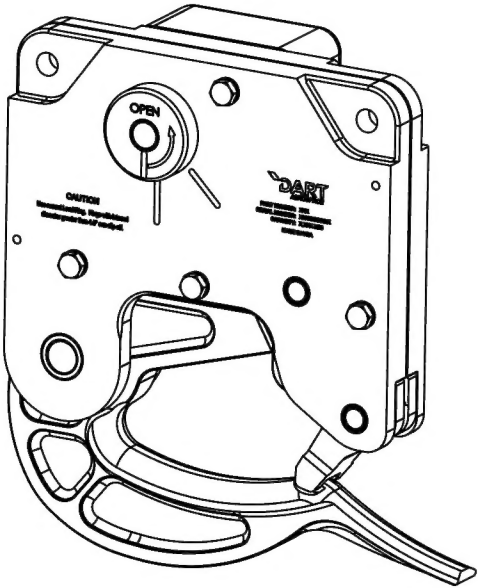


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
			C45-1-1	1	MANUAL KNOB RELEASE	6061		2
			C45-3-2	1	LATCH ROLLER PIN	O-1		3
		B/O	C45-3-2-1	2	SNAP RING	STEEL	Ø3/8 (KAMAN 1400-0037)	3
			C45-3-3	1	LATCH ROLLER	4140/4142		3
			C45-3-4	2	LINK PIN	O-1		3
		B/O	C45-3-4-1	4	RETAINING RING	BERYLLIUM COPPER	3/16 SHAFT (MCMaster-CARR #98410A110)	3
		B/O	C45-3-5	2	SPACER	TEFLON	(MCMaster-CARR #95606A180)	3
			C45-3-6	1	LATCH	17-4 S.S.		3
			C45-3-7	1	LINK	O-1		3
			C45-3-8A	1	ACTUATOR SHAFT BUSHING	AL BRONZE 630	(MCMaster-CARR #8203K612) MODIFIED	3
			C45-3-8B	1	ACTUATOR SHAFT BUSHING SOLENOID SIDE	AL BRONZE 630	(MCMaster-CARR #8203K612) MODIFIED	3
		B/O	C45-3-9	1	LEVER SPRING	303 S.S.	Ø .045 X 9-1/4 DENDOFF	3
			C45-3-11	1	ACTUATOR	17-4 S.S.		3
		B/O	C45-3-12	1	DU BEARING		(KAMAN 06DU06)	3
			C45-4-1	2	TRUNNION BUSHING	AL-BRONZE 630	(MCMaster-CARR #8203K812) MODIFIED	2
			C45-4-4A	1	C45 LOAD BEAM ASSY.			2
			C45-4-5	1	LOAD BEAM SPACER	4140/4142 Q&T		2
		B/O	C45-5-1	1	LEVER STOP PIN	STEEL	1/4 X 1-3/8 (MCMaster-CARR #98381A545)	2
			C45-5-2	1	LEVER STOP	304 S.S.		2
			C45-7-1	1	LOAD BEAM BUMPER	POLYURETHANE		2
			C45-7-2	2	LOCK BUMPER	PLOYURETHANE		2
			C45-8-1-2	2	SOLENOID NUT	304 S.S.		2
			C45-8-2	1	SOLENOID ASSY		(REF: H-2553-020)	2
			C45-8-4	1	SOLENOID COVER GASKET	BLENDED RUBBER		2
			C45-8-5	1	SOLENOID COVER	6061		2
			C45-9-1	1	CLOCK SPRING COVER	6061		2
		B/O	C45-9-2	1	CLOCK SPRING	303 S.S.	.03 X .75 X 15 DENDOFF SPRING	2
		B/O	C45-10-1	1	SPRING PIN	S.S.	1/4 X 1.0 (MCMaster-CARR #92373A183)	2
		B/O	C45-11-2	2	LOCATING PIN	S.S.	Ø3/16 X 1 (MCMaster-CARR #90145A510)	2
			C45-12-1	2	LOCK BUSHING	4140/4142		3
			C45-12-2	1	LOCK SHAFT	4140/4142		3
			C45-12-4	1	LOCK ROLLER	4140/4142		3
			C45-12-5	1	LOCK ROLLER PIN	4140/4142		3
		B/O	C45-12-6	2	RETAINING RING	STEEL	(KAMAN #N1400-0050)	3
			C45-13-1	2	KEEPER BUSHING	4140/4142		3
		B/O	C45-13-2	2	SPACER	NYLON	(MCMaster-CARR #95606A210)	3
			C45-13-3	1	KEEPER SHAFT	4140/4142		3
			C45-13-4	1	KEEPER	4140/4142		3
		B/O	C45-13-5	1	KEEPER SPRING	303 S.S.	CHAMBERLAIN SPRING	3
			C60-2-1	1	SIDE PLATE	7075-T6		2
		B/O	C60-3-1	2	RADIAL BEARING		(KAMAN #16142RS)	3
			C60-3-10	1	LATCH SHAFT	17-4 S.S.		3
			C60-10-2	1	LOCK SPRING	302 S.S.	Ø.25 OD X Ø.026 WIRE (MCMaster-CARR #9665K85) MODIFIED	3
			C60-11-1	1	SIDE PLATE SOLENOID	7075-T6		3
			C60-12-3	1	LOCK	4140/4142		3
		B/O	C10-41	1	STRAIN RELIEF CONNECTOR	BRASS	1/2 TRADE SIZE (MCMaster-CARR #6907K14)	2
		B/O	C2-14-2	2	LABEL RIVETS 	18-8 S.S.	NO 4 (MCMaster-CARR #91654A106)	N/S
			600.1309	1	LABEL 	ALUMINUM		N/S
			600.1309-A	1	LABEL 	ALUMINUM		N/S
		B/O	600.1312	1	CAUTION STICKER 			N/S
		B/O	AN4-23A	2	BOLT	STEEL	1/4-28 X 2.41	2
		B/O	AN5-21A	4	BOLT	STEEL	5/16-24 X 2.22	2
		B/O	AN960-416	3	WASHER	STEEL	1/4	2
		B/O	AN960-516	8	WASHER	STEEL	Ø5/16	2
		B/O	MS21044N5	4	LOCK NUT	S.S.	5/16	2
		B/O	MS27039-4-08	1	BOLT	STEEL	1/4-28 X .531	2
		B/O	188-FSCS-1032-5/8	4	SCREW	S.S.	10-32 X 5/8 FSHCS (MCMaster-CARR #92210A303)	2
		B/O	188-FPSS-1/4 20-3/8	2	SET SCREW	S.S.	1/4-20 (MCMaster-CARR #92313A535)	2
		B/O	EL-PLUG-M	1	MALE PLUG	PE High Density	(MCMaster-CARR #7216K5)	2
		B/O	EL 314-SJTOW 3/14	1	3 WIRE		(TEXCAN 314-SJTOW 3/14)	2
		B/O	32448	2	16-14 AWG KNIFE CONNECTOR		(ALLIED ELECTRONICS 32448)	2
		B/O		1	HEAT SHRINK TUBE	RUBBER	(MCMaster-CARR #2595K22)	N/S



REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1	15-0157	UPDATED TO NEW DRAFTING STANDARDS. ADDED FOR REBUILD ONLY NOTES. CH'D P/N'S TO MIL SPEC. ADDED ENGRAVE NOTES & DETAILS. ADDED P/N'S 600.1309-A, 32446.	7/2/2015	DPD	JAG
2	15-0228	C45-5-1 CH'D B/O WAS Ø1/4 X 1-1/2 #98381A546 IS 1/4 X 1-3/8 #98381A545. CH'D P/NS: WAS C45-1-2 IS 188-FPSS-1/4 20-3/8 . WAS C45-9-1-1 IS 188-FSCS-1032-5/8 . MS27039-4-10 REPLACED WITH MS27039-4-08 . CORD GRIP REPLACED WITH C10-41 . 32446 REPLACED WITH 32448.	8/24/2015	DPD	JAG

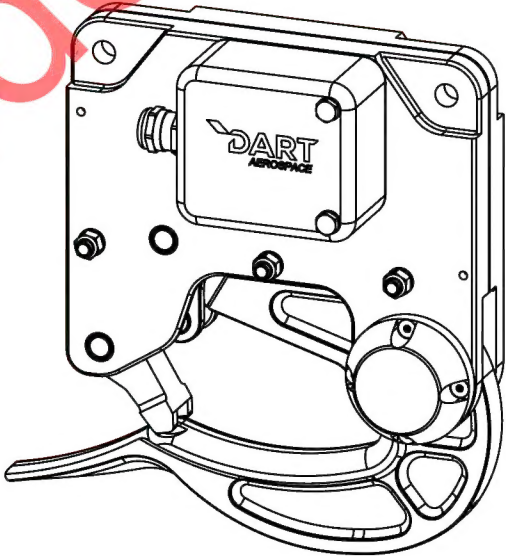

NOTES:


 FOR REBUILD ONLY.

 FOR CUSTOMER REBUILD ONLY.


	
TITLE C60-HOOK	
DWG NO. C60	REV 2
MAT'L UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± 5° .X ± .1 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING	DRAWN BY: APPROVED  TREAT FINISH SPEC USED ON MODEL
SCALE 1:4	DATE SHEET 1 OF 3

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.


REVISIONS			DESCRIPTION	DATE	INITIAL	APPROVED
REV	ECR					

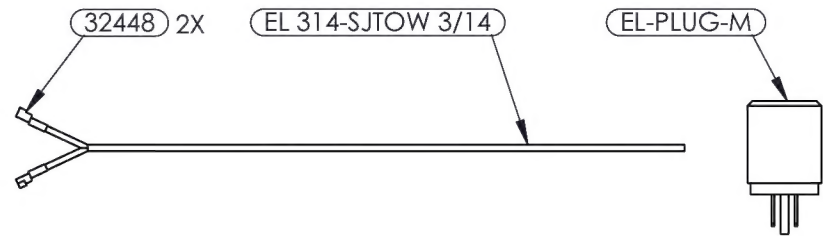

WIRE ASSEMBLY - 1 PER ASSEMBLY
WHEN INSTALLING TO SOLENOID USE 2 SECTIONS
OF HEAT SHRINK TO SEAL CONNECTION.
PLUG INCLUDED LOOSE IN KIT.

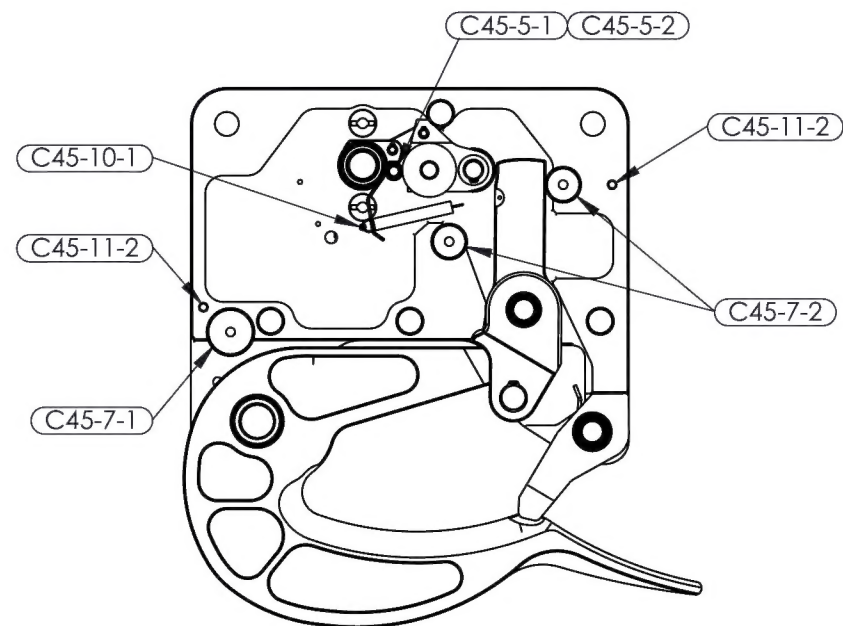


SIDE PLATE REMOVED TO SHOW
INTERNAL COMPONENTS

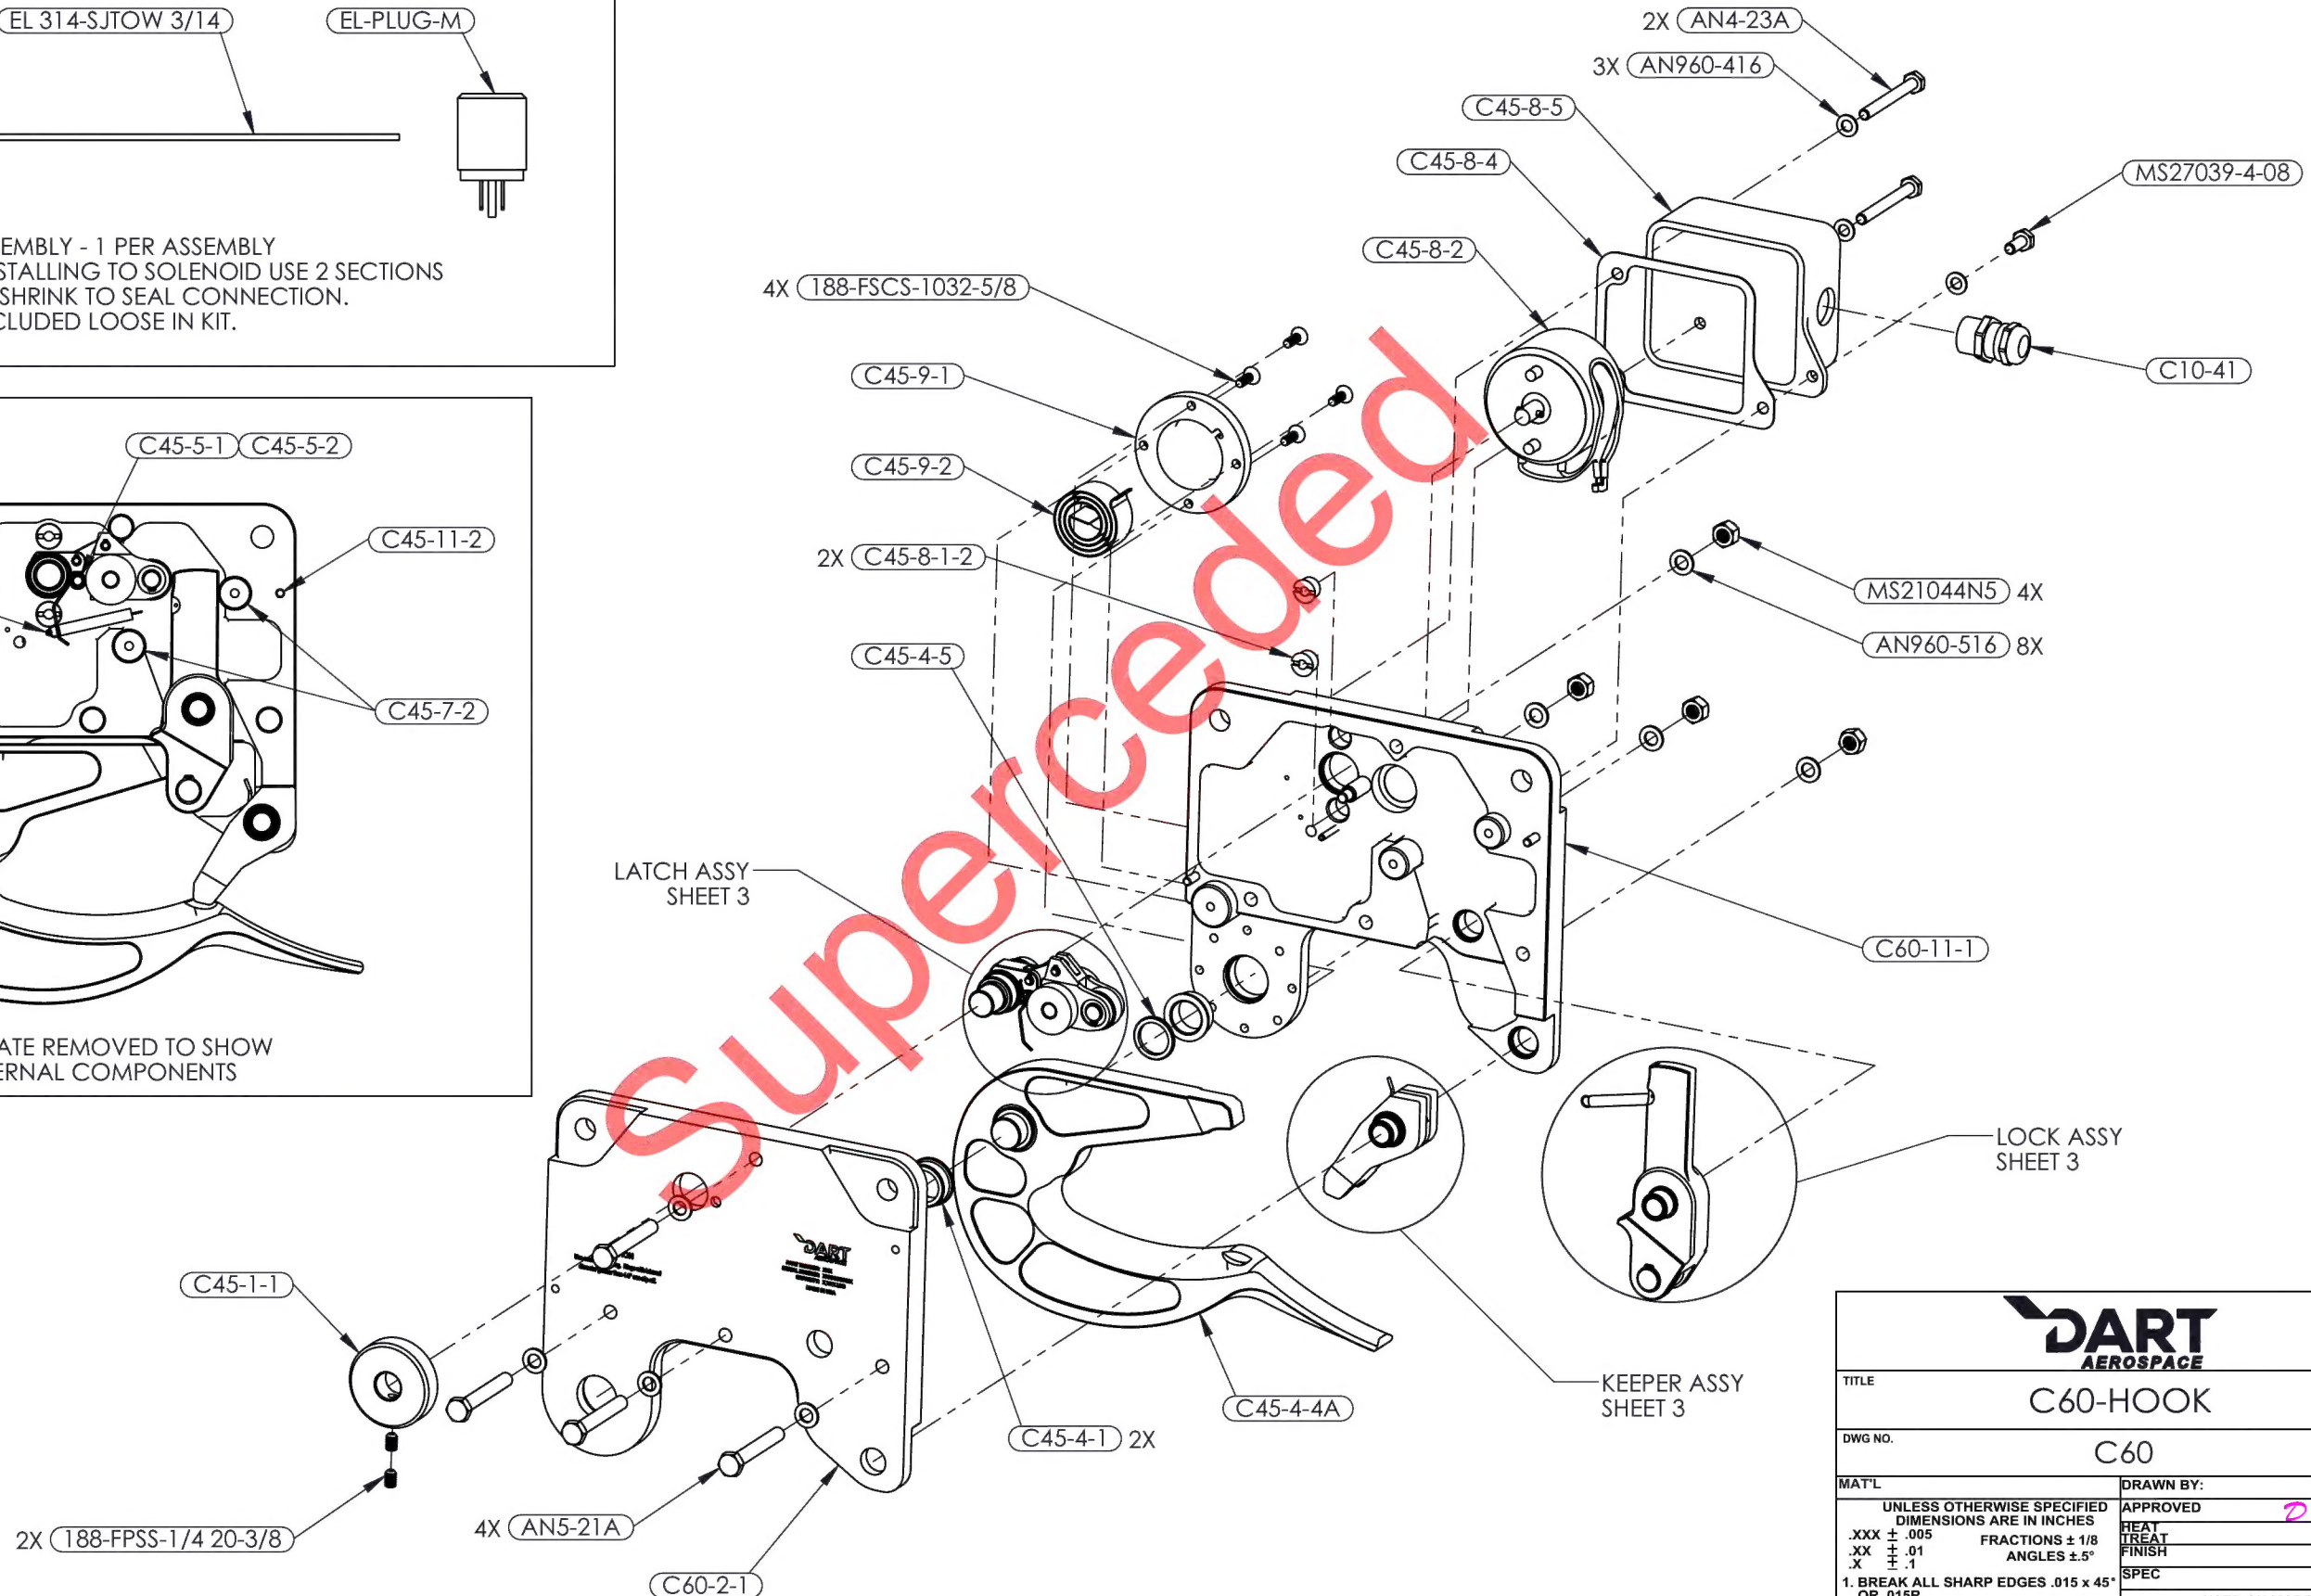

DART AEROSPACE	
TITLE C60-HOOK	
DWG NO. C60	REV 2
MAT'L UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± 5° .X ± .1 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING	DRAWN BY: APPROVED TREAT FINISH SPEC USED ON MODEL
SCALE 1:4	DATE SHEET 2 OF 3

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED

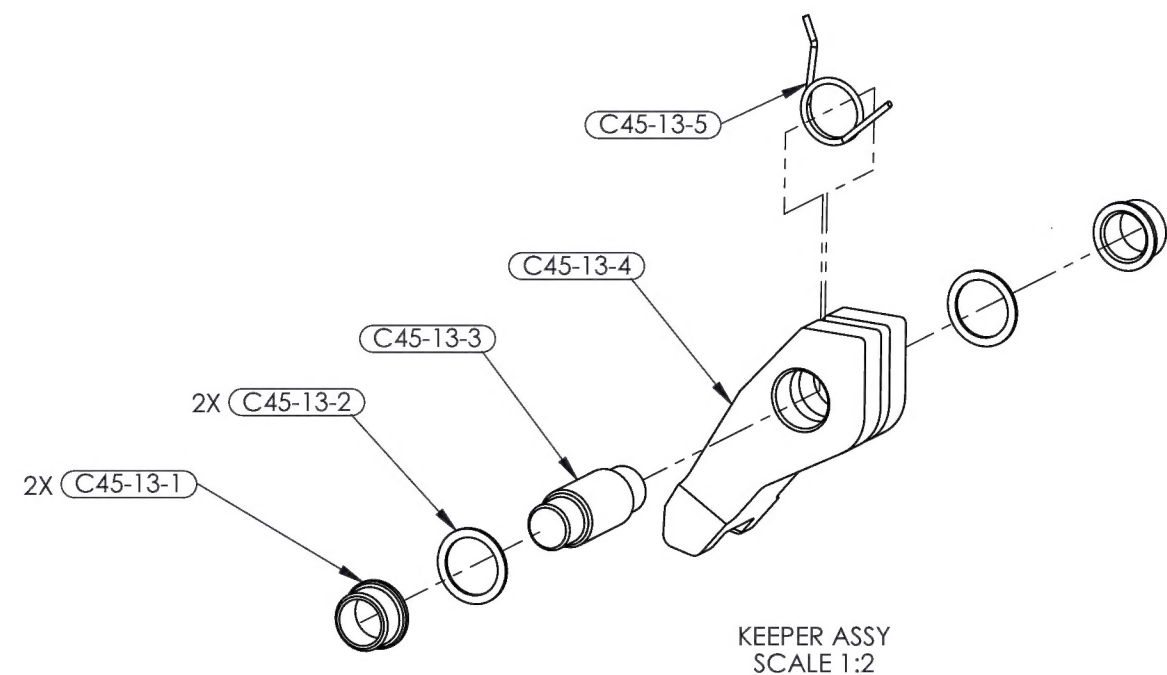


CAUTION
Use correct Load Ring. Rings with internal diameter greater than 4.0" can slip off.



PART NUMBER: XXX
SERIAL NUMBER: XXXXXXXXXXXX
CAPACITY: X,XXX LBS
MADE IN USA



DETAIL A
SCALE 1 : 1


DETAIL B
SCALE 1 : 1

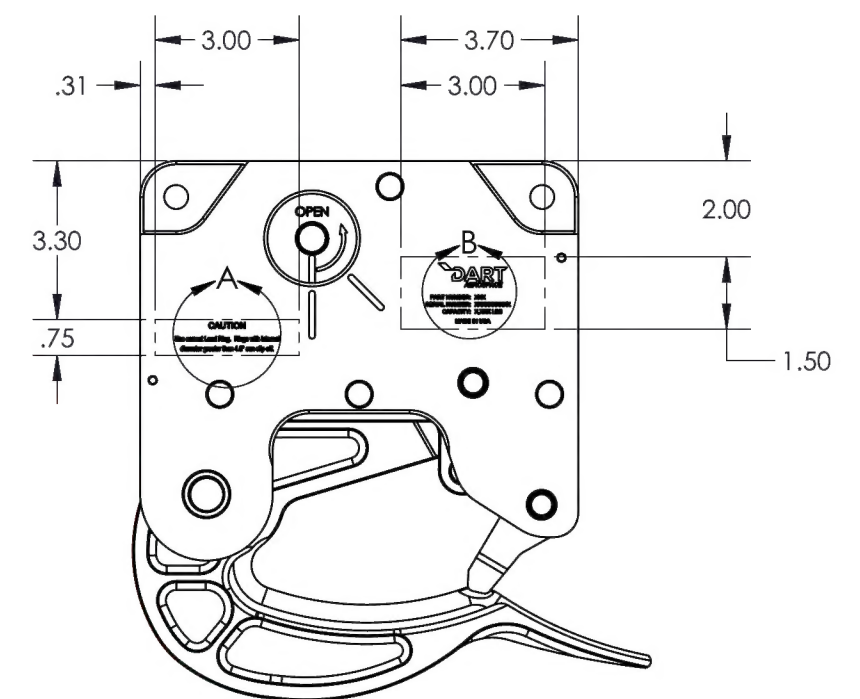

NOTES:

- 3 LASER ENGRAVE DART LOGO, P/N, S/N,
"MADE IN USA," WITHIN BOUNDARY.
- 4 LASER ENGRAVE CAUTION NOTE
WITHIN BOUNDARY.

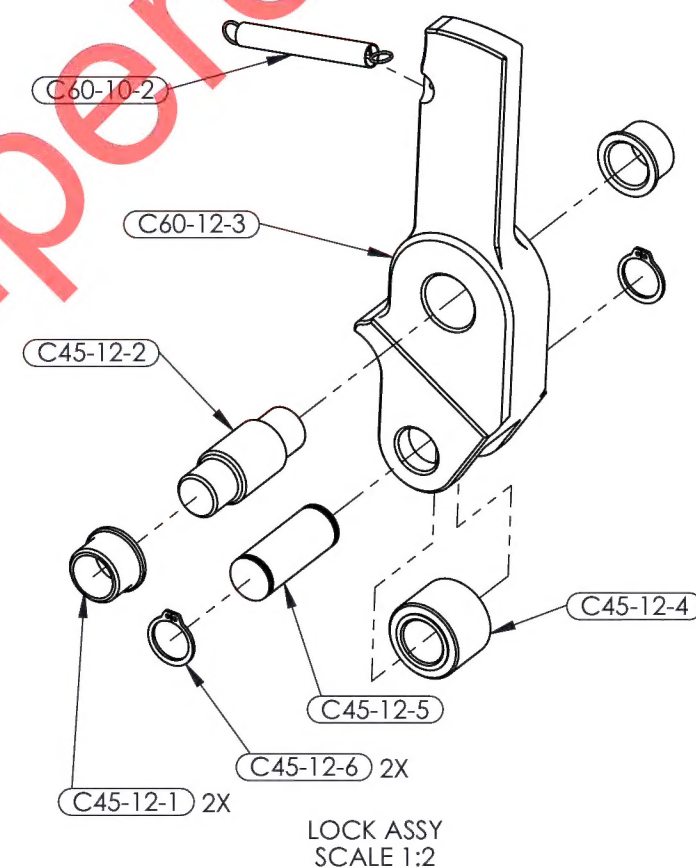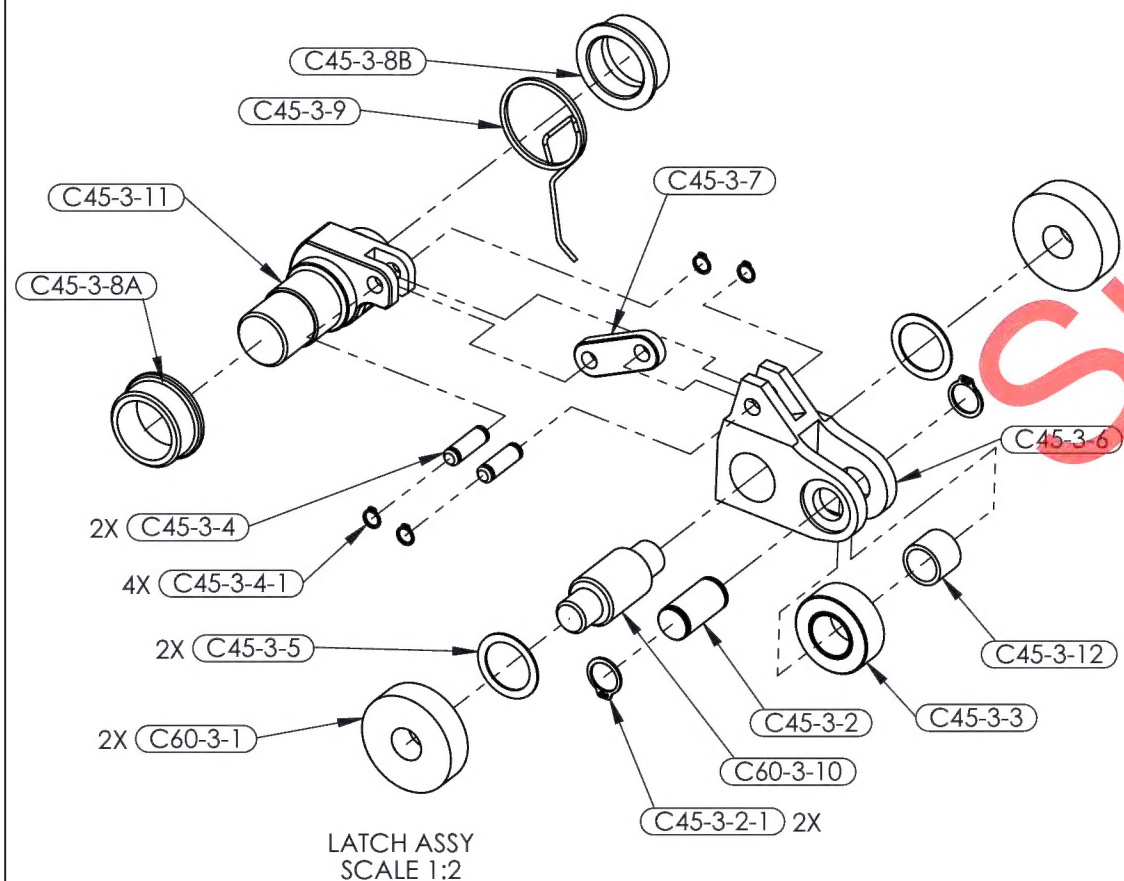

			
TITLE			
C60-HOOK			
DWG NO.			REV
C60			2
MAT'L		DRAWN BY:	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8" .XX ± .01 ANGLES ± 5° .X ± .1		APPROVED	
		<i>D Weil</i>	
		HEAT	
		TREAT	
		FINISH	
1. BREAK ALL SHARP EDGES .015 x .45" OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING		SPEC	
		USED ON MODEL	
SCALE	1:4	DATE	SHEET 3 OF 3